



Compact Closed Oil Mist Filters

EE Series Threaded, ISO FLG

Benefits

- Compact, low profile design
- Easy field maintenance

Features


- Captures oil fog, mist or aerosol from discharge of oil sealed vacuum pumps
- Back pressure valve designed to release element at 0.5 bar (7.35 PSI) differential for pump safety
- Seamless drawn housings
- Corrosive-resistant carbon steel construction
- White powder coat finish
- EE-PSG925 assemblies come standard in zinc nickel finish
- 1/8" NPSC oil drain

Technical Specifications

- 0.3 micron media; 99.97% efficiency
- Continuous operating temp: 68°F (20°C) to 180°F (80°C)
- Mounted vertically

Options

- Additional ISO flange connections
- Nonstandard finishes available
- Assemblies without a valve

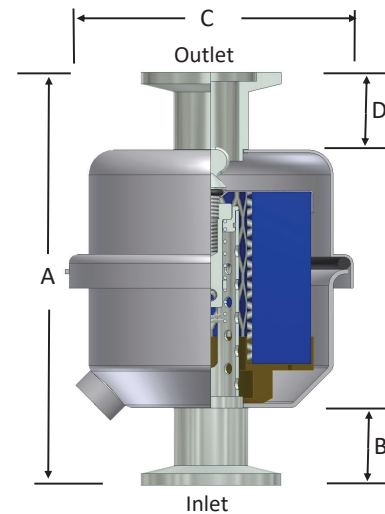

Inlet Type	Outlet Type	Assembly SCFM Rating	Assembly Part Number	Dimensions - inches				Replacement Element Part No.	Element SCFM Rating
				A	B	C	D		
3/4" MPT	1/2" NPSC	8	EE-GL915-075	4 9/16	1 1/8	3 1/4	1/2	GL915	8
16 mm ISO Flg	16 mm ISO Flg	8	EE-GL915-QF16	4 11/16	7/8	3 1/4	7/8	GL915	8
25 mm ISO Flg	25 mm ISO Flg	8	EE-GL915-QF2516	4 11/16	7/8	3 1/4	7/8	GL915	8
25 mm ISO Flg	25 mm ISO Flg	20	EE-PSG925-QF25	7 3/8	7/8	5 1/4	7/8	PSG925	20

Note: QF2516 Designation: Unit has an ISO NW25 flange with a 16 mm tube (neck).
See Oil Mist Discharge Filter Technical Data for sizing guidelines.

Rev: EE-US1809K