

# “L” Style Compact Vacuum Filters

## CSL Series 3” - 4”

### Benefits

- Reduce your package footprint with compact filter configuration without sacrificing airflow
- Minimize equipment pressure-drop change with low pressure-drop filter design

### Features

- Seamless drawn housings
- O-ring seal
- Corrosive resistant black powder coat carbon steel
- Stainless steel torsion clips for durability


### Technical Specifications

- Vacuum Rating: medium vacuum service\*
- Temp (continuous): min -15°F (-26°C) max 220°F (104°C)
- Filter change out differential: 15-20" H<sub>2</sub>O over initial Δ P
- Polyester: 99%+ removal efficiency standard to 5 micron
- Paper: 99%+ removal efficiency standard to 2 micron

### Options



- Integrated baffle
- Vacuum gauge
- Differential inlet/outlet gauge taps
- Material/Finishes: stainless steel, epoxy coating
- Support brackets

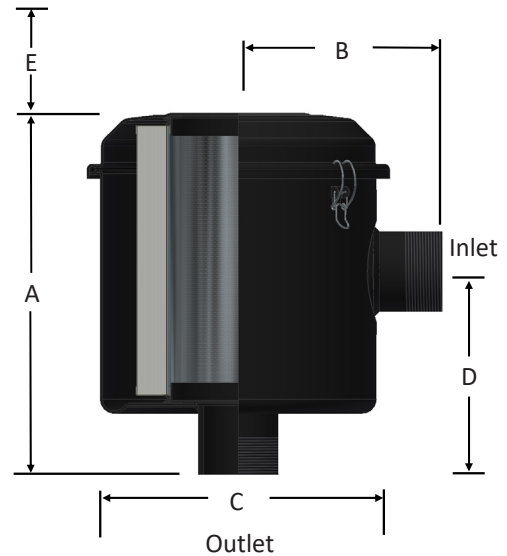

Inlet/Outlet Size	Assembly Type	Assembly SCFM Rating	Assembly Part Number		Dimensions - inches				Suggested Service ht. E	Approx. Weight lbs	Replacement Element Part No.		Element SCFM Rating
			Polyester	Paper	A	B	C	D			Polyester	Paper	
3"	MPT	300	CSL-2541-300B	CSL-2540-300B	15 3/4	9	13 1/4	8 7/8	12"	30	2541	2540	800
4"	MPT	520	CSL-2541-400B	CSL-2540-400B	16 1/4	9 1/2	13 1/4	9 1/2	12"	32	2541	2540	800

For additional dimensional details, please request a Solberg sales drawing.

\*See Vacuum Filter Technical Data for Vacuum Service Data.

Rev: CSL 3-4-US1903K

Sales/Service: 630.773.1363  
sales@solbergmfg.com

[www.solbergmfg.com](http://www.solbergmfg.com)

All model offerings and design parameters are subject to change without prior notice.  
Contact your representative or Solberg for the most current information.