

# Discharge Oil Mist Filters (External Drain)

## EE Series

### Benefits

- Compact, low profile design
- Easy field maintenance

### Features

- Captures oil fog, mist or aerosol from discharge of oil sealed vacuum pumps
- Seamless drawn housings
- Corrosive resistant white powder coat carbon steel
- EE-PSG925 assemblies come standard in zinc nickel finish
- 1/8" external drain




### Technical Specifications

- 0.3 micron media; 99.97% efficiency
- Continuous operating temp: 68°F (20°C) to 180°F (80°C)
- Back pressure valve designed to release element at 0,5 bar (7.35 PSI) differential for pump safety

### Options

- Additional ISO flange connections
- Nonstandard finishes available

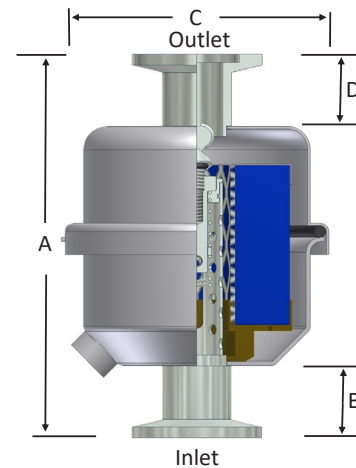

Inlet Type	Outlet Type	Assembly SCFM Rating	Assembly Part Number	Dimensions - inches				Suggested Service ht. inches	Replacement Element Part No.	Element SCFM Rating
				A	B	C	D			
3/4" NPT	1/2" NPSC	8	EE-GL915-075	4 9/16	1 1/8	3 1/4	1/2	3	GL915	8
16 mm ISO Flg	16 mm ISO Flg	8	EE-GL915-QF16	4 11/16	7/8	3 1/4	7/8	3	GL915	8
25 mm ISO Flg	25 mm ISO Flg	8	EE-GL915-QF2516	4 11/16	7/8	3 1/4	7/8	3	GL915	8
25 mm ISO Flg	25 mm ISO Flg	20	EE-PSG925-QF25	7 3/8	7/8	5 1/4	7/8	5	PSG925	20

Note: QF2516 designation: unit has an ISO NW25 flange with a 16 mm tube (neck).  
See Oil Mist Discharge Filter Technical Data for sizing guidelines.

Rev: EE-US0321K