

High Efficiency Replacement Elements

HE Elements 1 - 1395 SCFM Flow Range

Features

- Pleated media for high dirt holding capacity
- Heavy duty industrial strength glass surrounded by galvanized expanded metal
- Sized to minimize pressure drop
- Platisol potting standard

Technical Specifications

- 99.97% removal efficiency to 0.3 micron
- Temp (continuous): min -15°F (-26°C), max 220°F (104°C)

Options

- Chemical resistant and high temperature construction

Applications

- Medical / Pharmaceutical industry


Endcap Construction

- B = Closed one end with bolt hole, open on other end
- C = Closed one end, open on other end
- G = Galvanized metal
- M = Molded platisol
- N = Neoprene blended gasket on open endcaps
- R = Mixed rubber/cork gasket on open endcaps



Rev: HEPA-US0721K

HE Elements 1 - 1395 SCFM Flow Range

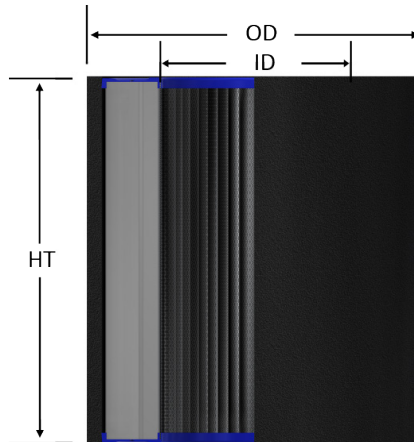

Element Part Number	Element SCFM Rating	Dimensions - inches			Std. Endcap Features
		I.D.	O.D.	H.T.	
HE04	1	--	2 1/4	1	--
HE06	5	--	3	1 3/8	--
HE10	10	--	4	1 3/8	--
HE14	9	3	4 3/8	2 5/16	M
HE18	22	3	4 3/8	4 3/4	M
HE30	56	3 5/8	5 3/4	4 3/4	M
HE34	95	4 3/4	7 7/8	4 13/16	M
HE230	112	3 5/8	5 3/4	9 1/2	M
HE234	207	4 3/4	7 7/8	9 3/8	GN
HE238	474	4 7/8	9 1/4	10	GN
HE244	346	6	9 3/4	9 5/8	GN
HE274	432	8	11 3/4	9 5/8	GN
HE334	322	4 3/4	7 7/8	14 1/2	GN
HE344	510	6	9 3/4	14 1/2	GN
HE374	643	8	11 3/4	14 1/2	GN
HE376	1162	9	14 5/8	14 1/2	GN
HE384	1395	14	19 5/8	14 1/2	GN

800 Series Elements

Element Part Number	Element SCFM Rating	Dimensions - inches			Std. Endcap Features
		I.D.	O.D.	H.T.	
HE824	7	1 1/2	2 1/2	2 5/8	GC
HE842	14	2 3/8	3 7/8	2 3/4	G
HE848	43	5	2 1/2	4 3/4	G
HE850	129	3 1/2	5 7/8	8 1/2	GR
HE850/1	129	3 1/2	5 7/8	8 1/2	GBR
HE896	48	2 3/8	4	8 1/2	GB

See Element Technical Data for maintenance guidelines.



SOLBERG[®]

www.solbergmfg.com

All model offerings and design parameters are subject to change without prior notice. Contact your representative or Solberg for the most current information.