

High Efficiency Replacement Elements

UL Elements 7 - 1395 SCFM Flow Range

Features

- Pleated media for high dirt holding capacity
- Heavy duty industrial strength glass surrounded by galvanized expanded metal
- Sized to minimize pressure drop
- Plastisol potting standard

Technical Specifications

- 99.995% removal efficiency to 0.1 micron
- Temp (continuous): min -15°F (-26°C), max 220°F (104°C)

Options

- Chemical resistant and high temperature construction

Applications

- Medical / Pharmaceutical industry


Endcap Construction

- B = Closed one end with bolt hole, open on other end
- C = Closed one end, open on other end
- G = Galvanized metal
- M = Molded plastisol
- N = Neoprene blended gasket on open endcaps
- R = Mixed rubber/cork gasket on open endcaps



Rev: ULPA-US1122C2

UL Elements 7 - 1395 SCFM Flow Range

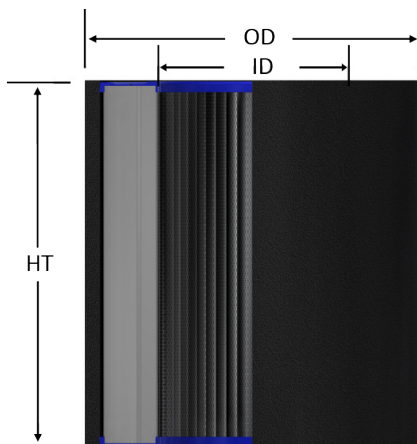

Element Part Number	Element SCFM Rating	Dimensions - inches			Std. Endcap Features
		I.D.	O.D.	H.T.	
UL14	9	3	4 ³ / ₈	2 ⁵ / ₁₆	M
UL18	22	3	4 ³ / ₈	4 ³ / ₄	M
UL30	56	3 ⁵ / ₈	5 ³ / ₄	4 ³ / ₄	M
UL34	95	4 ³ / ₄	7 ⁷ / ₈	4 ¹³ / ₁₆	M
UL230	112	3 ⁵ / ₈	5 ³ / ₄	9 ¹ / ₂	M
UL234	207	4 ³ / ₄	7 ⁷ / ₈	9 ³ / ₈	GN
UL238	329	4 ⁷ / ₈	9 ¹ / ₄	10	GN
UL244	346	6	9 ³ / ₄	9 ⁵ / ₈	GN
UL274	432	8	11 ³ / ₄	9 ⁵ / ₈	GN
UL334	322	4 ³ / ₄	7 ⁷ / ₈	14 ¹ / ₂	GN
UL344	510	6	9 ³ / ₄	14 ¹ / ₂	GN
UL374	643	8	11 ³ / ₄	14 ¹ / ₂	GN
UL376	1162	9	14 ⁵ / ₈	14 ¹ / ₂	GN
UL384	1395	14	19 ⁵ / ₈	14 ¹ / ₂	GN

800 Series Elements

Element Part Number	Element SCFM Rating	Dimensions - inches			Std. Endcap Features
		I.D.	O.D.	H.T.	
UL824	7	1 ¹ / ₂	2 ¹ / ₂	2 ⁵ / ₈	GC
UL842	14	2 ³ / ₈	3 ⁷ / ₈	2 ³ / ₄	G
UL848	43	5	2 ¹ / ₂	4 ³ / ₄	G
UL850	129	3 ¹ / ₂	5 ⁷ / ₈	8 ¹ / ₂	GR
UL850/1	129	3 ¹ / ₂	5 ⁷ / ₈	8 ¹ / ₂	GBR
UL896	48	2 ³ / ₈	4	8 ¹ / ₂	GB

See Element Technical Data for maintenance guidelines.



SOLBERG[®]

www.solbergmfg.com

All model offerings and design parameters are subject to change without prior notice. Contact your representative or Solberg for the most current information.