

Vacuum Truck Filter Elements

VT Series

Features

- Pleated media for high dirt holding capacity
- Polyester: reinforced with epoxy coated steel wire on both sides of media, heavy duty galvanized perforated metal I.D.
- Heavy-duty ribs for additional strength
- 40 - 50% increased dust loading capacity with prefilter (part number suffix P); can be added to any replacement element
- Low pressure drop for improved equipment performance
- Made in the USA

Polyester Media Benefits/Technical Specifications

- Less maintenance due to longer durability
- Moisture resistant
- Washable with lukewarm water and mild detergent (replacing element is recommended)
- Polyester: 99+% removal efficiency at 5 micron
- Temp (continuous): min -15°F (-26°C), max 220°F (104°C)




Endcap Construction

- M = Molded plastisol
- B = Closed one end with bolt hole, open on other end
- G = Galvanized metal
- N = Neoprene gasket on open endcaps

Common Filter Sizes for Vacuum Truck Market

Element Part Number	Dimensions - inches			Std. Endcap Features
	I.D.	O.D.	H.T.	
VT607	11.50	16.00	24.00	M
VT599P	14.00	19.62	21.50	GN
VT799P	14.00	19.62	28.00	GN
VT259	16.00	22.00	11.00	M
VT559/1	16.00	22.00	19.84	MB
VT559	16.00	22.00	20.75	M
VT559MET	16.00	22.00	20.75	GN

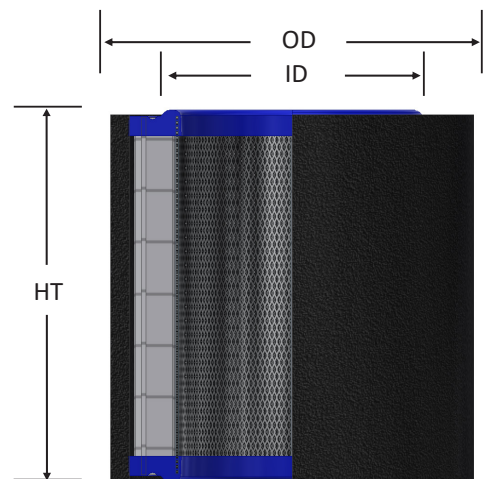

Note: Additional sizes available. Options include 1-100 micron polyester, wiremesh, stainless steel, and outer diameter expanded metal. Contact factory for more information or see filter media specifications.

Rev: VT-US0724C2