


RE	EV	DESCRIPTION	ECN#	CHG BY	DATE	APP'D
P	4	CHANGED FOOTPAD, WAS .625" HOLE	-	CRW	02/01/18	M.C.
E	3	CHANGED LEGS FOR EXTRA HOLE SET		DOL	02/28/20	CJS
	)	UPDATED REMOVAL CLEARANCES	21357	JSR	03/02/21	TAS
	)	UPDATED SHIPPING POSITION, FOOTPAD DIM, NOTE 2	21627	RWK	04/01/21	JSR

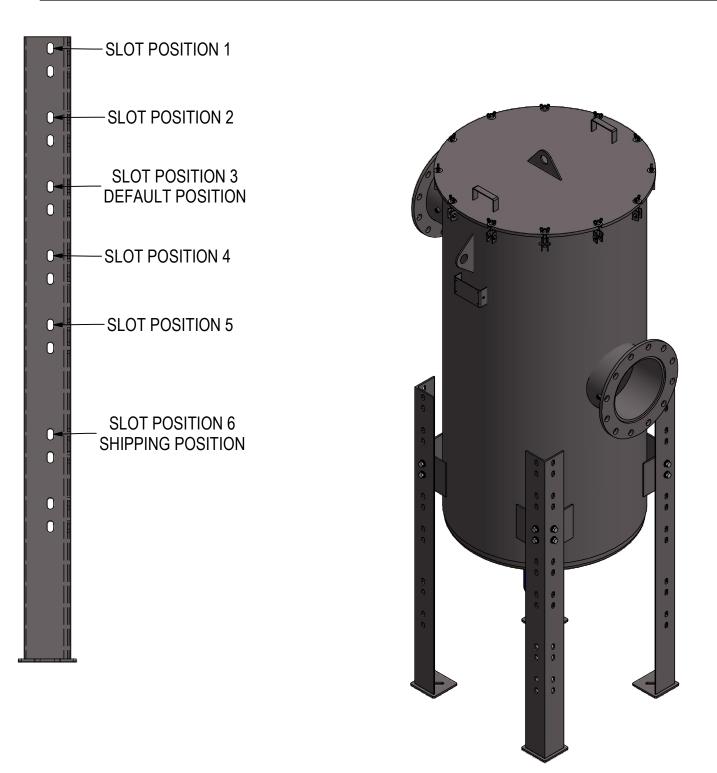

SLOT POSITION	DIM A	DIM B	DIM C	DIM D
1	75.75 (1923mm)	17 (432mm)	84.25 (2139mm)	105.25 (2673mm)
2	69.75 (1771mm)	17 (432mm)	78.25 (1987mm)	99.25 (2521mm)
3 (DEFAULT)	63.75 (1619mm)	17 (432mm)	72.25 (1835mm)	93.25 (2369mm)
4	57.75 (1467mm)	17 (432mm)	66.25 (1683mm)	87.25 (2217mm)
5	51.75 (1315mm)	17 (432mm)	60.25 (1531mm)	81.25 (2065mm)
6 (SHIPPING)	42.25 (1073mm)	17 (432mm)	50.75 (1289mm)	71.75 (1822mm)

**NOTES & SPECIFICATIONS:** 

1. LIQUID CAPACITY (HI GAUGE PORT CENTERLINE): 40 GAL.

2. CHECK THE MAINTENANCE MANUAL FOR SERVICE HEIGHT RECOMMENDATIONS.



THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC.
AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

## **TOLERANCES**

DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE **UPON PRODUCTION.** 

UNLESS OTHERWISE SPECIFIED:

-DIMENSIONS ARE IN INCHES
-REF: APPROXIMATE DIMENSIONS, NO TOLERANCES APPLY
-FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER

MODEL #: KNOCKOUT1000F	MATERIAL: CARBON STEEL	FINISH: RAL 7036	
MODEL NUMBER: KNOCKOLIT1000E			

1 OF 1

REV:

D

**DESCRIPTION:** KNOCKOUT1000F, TANK, LEGS, SIGHT GLASSES, PLUGS, BALL VALVE, SMI, RAL7036

PROJECT:	DRAWN BY: CRW	APPROVED BY: M.C.	
	<b>DATE</b> : 1/5/2018	<b>DATE</b> : 1/5/2018	