

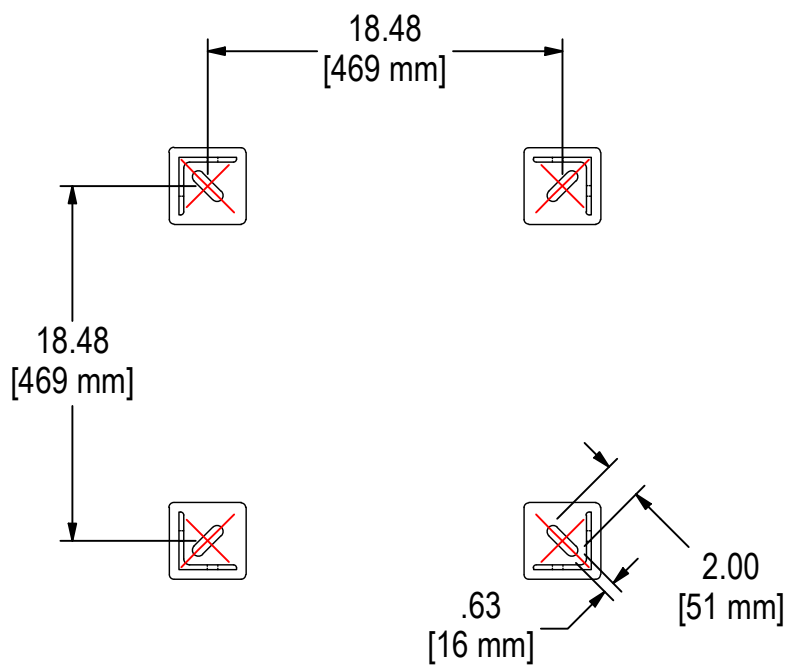
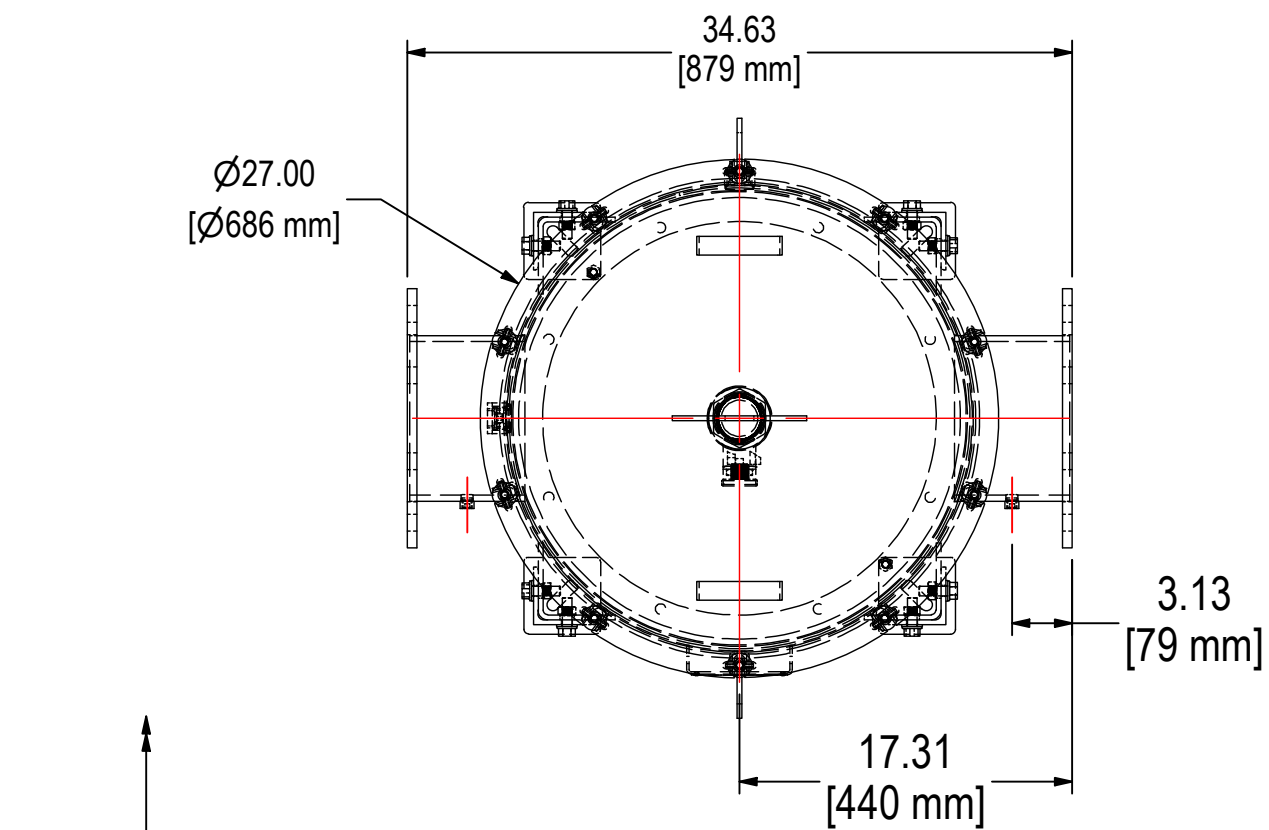


REV	DESCRIPTION	ECN #	CHG BY	DATE	APP'D
A	CHANGED FOOTPAD, WAS .625" HOLE	-	CRW	02/01/18	M.C.
B	UPDATED REMOVAL CLEARANCES	21357	JSR	03/02/21	TAS
C	UPDATED SHIPPING POSITION, ADDED NOTE 2	21627	RWK	04/01/21	JSR
D	ADDED ALIGNMENT PINS	23265	NAD	12/08/21	JEB

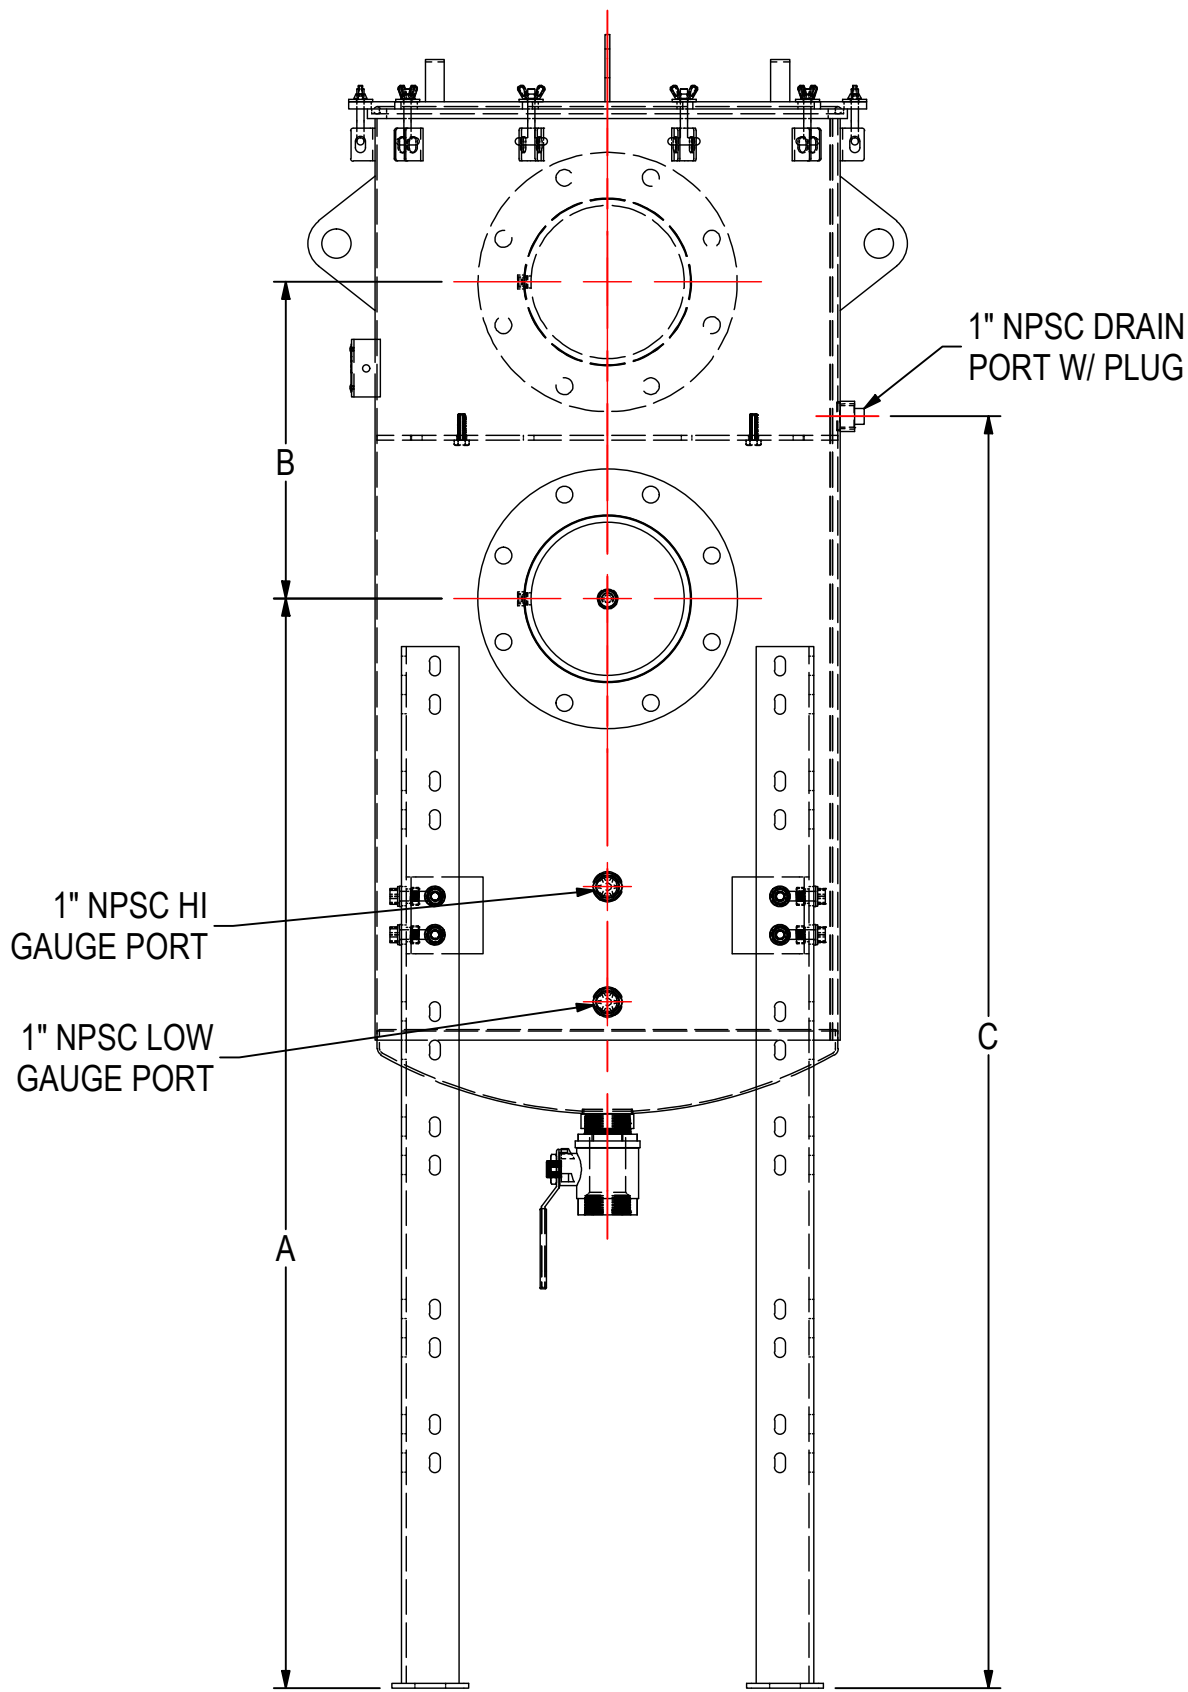

FOOTPAD LAYOUT

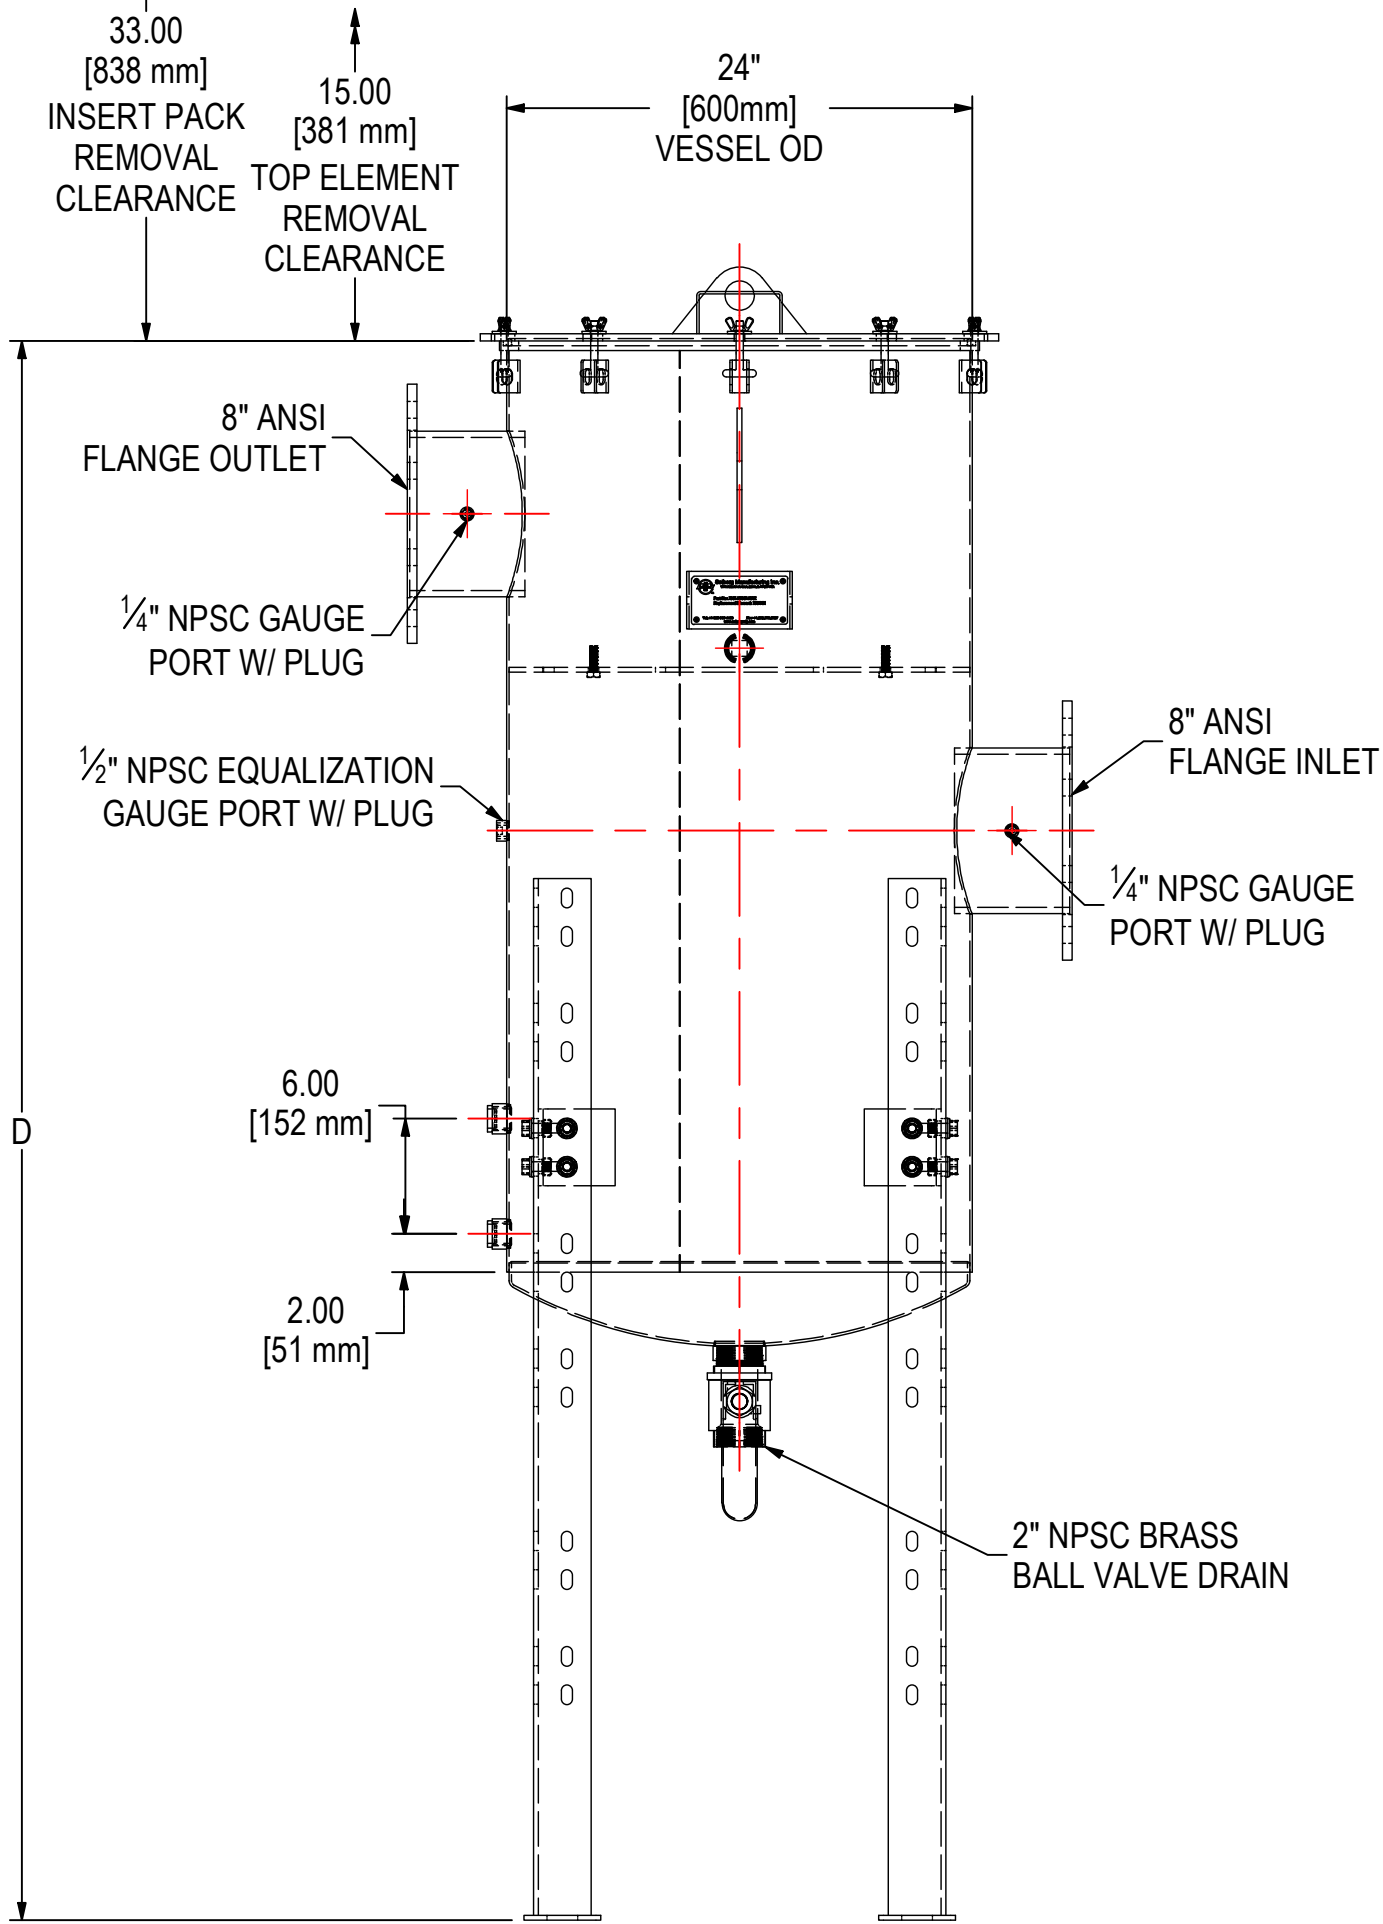

- SLOT POSITION 1
- SLOT POSITION 2
- SLOT POSITION 3
DEFAULT POSITION
- SLOT POSITION 4
- SLOT POSITION 5
- SLOT POSITION 6
SHIPPING POSITION



SLOT POSITION	DIM A	DIM B	DIM C	DIM D
1	68.75 (1745mm)	16.5 (419mm)	78.25 (1987mm)	94.25 (2393mm)
2	62.75 (1593mm)	16.5 (419mm)	72.25 (1835mm)	88.25 (2241mm)
3 (DEFAULT)	56.75 (1441mm)	16.5 (419mm)	66.25 (1683mm)	82.25 (2089mm)
4	50.75 (1289mm)	16.5 (419mm)	60.25 (1531mm)	76.25 (1937mm)
5	44.75 (1137mm)	16.5 (419mm)	54.25 (1379mm)	70.25 (1785mm)
6 (SHIPPING)	35.25 (895mm)	16.5 (419mm)	44.75 (1137mm)	60.75 (1543mm)

NOTES & SPECIFICATIONS:

- LIQUID CAPACITY (HI GAUGE PORT CENTERLINE): 24 GAL.
- CHECK THE MAINTENANCE MANUAL FOR SERVICE HEIGHT RECOMMENDATIONS.

MODEL #: KNOCKOUT800F	MATERIAL: CARBON STEEL	FINISH: RAL 7036	SHEET: 1 OF 1
MODEL NUMBER: KNOCKOUT800F	DESCRIPTION: KNOCKOUT800F, TANK, LEGS, SIGHT GLASSES, PLUGS, BALL VALVE, SMI, RAL7036		
PROJECT:	DRAWN BY: CRW DATE: 7/17/2017	APPROVED BY: CJS DATE: 7/17/2017	REV: D