


REV	DESCRIPTION	ECN#	CHG BY	DATE	APP'D
Α	UPDATED REMOVAL CLEARANCES; UPDATED DIM D DIMENSIONS	21357	JSR	03/02/21	TAS
В	UPDATED SHIPPING POSITION, ADDED NOTE 2	21628	LJS	04/06/21	JEB

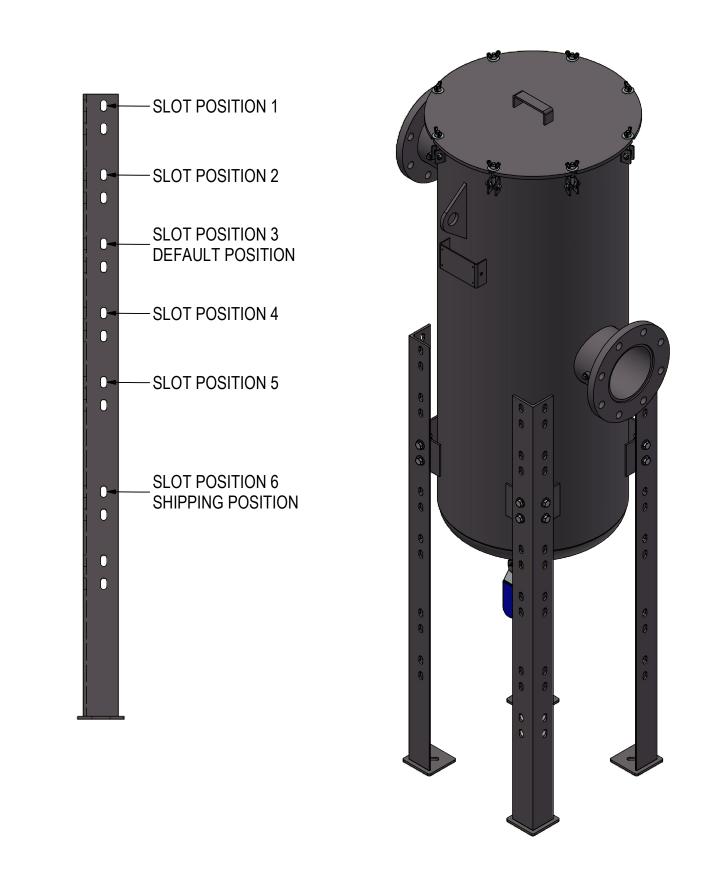

SLOT POSITION			DIM D	
1	68.75 (1745mm)	16.5 (419mm)	78.25 (1987mm)	94.25 (2393mm)
2	62.75 (1593mm)	16.5 (419mm)	72.25 (1835mm)	88.25 (2241mm)
3 (DEFAULT)	56.75 (1441mm)	16.5 (419mm)	66.25 (1683mm)	82.25 (2089mm)
4	50.75 (1289mm)	16.5 (419mm)	60.25 (1531mm)	76.25 (1937mm)
5	44.75 (1137mm)	16.5 (419mm)	54.25 (1379mm)	70.25 (1785mm)
6 (SHIPPING)	35.25 (895mm)	16.5 (419mm)	44.75 (1137mm)	60.75 (1543mm)

NOTES & SPECIFICATIONS:

- 1. LIQUID CAPACITY (HI GAUGE PORT CENTERLINE): 15 GAL.
- 2. CHECK THE MAINTENANCE MANUAL FOR SERVICE HEIGHT RECOMMENDATIONS.

MATERIAL: CARBON STEEL

	SOLBERG® Filtration • Separation • Silencing 630.773.1363 • www.solbergmfg.com
®	630.773.1363 • www.solbergmfg.com

THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC.
AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

TOLERANCES

DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE **UPON PRODUCTION.**

UNLESS OTHERWISE SPECIFIED: -DIMENSIONS ARE IN INCHES
-REF: APPROXIMATE DIMENSIONS, NO TOLERANCES APPLY
-FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER MODEL NUMBER: KNOCKOUTDN150-METRIC

DESCRIPTION: KNOCKOUTDN150, TANK, LEGS, SIGHT GLASSES, PLUGS, BALL VALVE, METRIC, RAL7036

PROJECT: **DRAWN BY:** JEB

DATE: 2/12/2018

REV: **APPROVED BY:** CRW В **DATE:** 2/12/2018

SHEET:

1 OF 1

FINISH: RAL 7036