

Discharge Silencer with Filter


EFS Series 3/8" - 1", NW16 - NW25

Features

- Captures tip seal dust
- Compact design combines both filtration efficiency and noise reduction
- Integrated inlet diffuser optimizes sound attenuation
- Multi-stage noise reducing features, including final stage sound absorbent insert
- Tubular silencing design - tube is positioned to maximize attenuation and air flow while minimizing pressure drop
- Patented high grade element with built-in Butterfly gasket seal which creates a positive seal between housing hemispheres, and a new seal with each element
- Seamless drawn housings
- Corrosive resistant black powder coat carbon steel
- Ability to mount vertically, or horizontally

Technical Specifications

- Temp (continuous): min -26°C (-15°F) max 104°C (220°F)
- Polyester: 99%+ removal efficiency standard to 10 micron

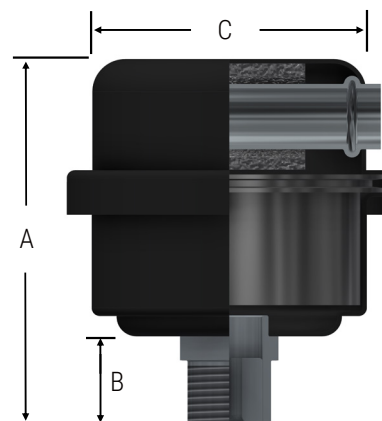

Inlet / Outlet		Assembly m ³ /hr Rating	Assembly Part Number	Dimensions (mm)			Suggested Service Height (mm)	Approx. Weight (kg)
Size	Type			A	B	C		
3/8"	MPT	4	EFS-05-038/1	71	17	63	51	0.23
1/2"	MPT	16	EFS-07-050/1	96	23	81	51	0.34
NW16	ISO Flange	16	EFS-07-NW16/1	96	22	81	51	0.34
NW25	ISO Flange	19	EFS-07-NW25/1	96	22	81	51	0.34
1"	MPT	41	EFS-11-100/2	115	32	106	51	0.57
NW25	ISO Flange	40	EFS-11-NW25/2	105	22	105	51	0.57

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

All model offerings and design parameters are subject to change without prior notice.
Contact your representative or visit www.solbergmfg.com for the most current information.

Rev: M2503F