

Replacement Elements - Hockey Puck

Small FS/PS 5 - 425 m³/hr Flow Range

Features


- High grade filter element
- Element construction of injection molded thermoplastic
- Integrated gasket seal
 - Positive seal between housing hemispheres
 - New seal with each element
 - Minimizes parts
- Optimal surface area per given size
- Pleated media for high dirt holding capacity

Technical Specifications

- Polyester: 99+% removal efficiency standard to 10 micron
- Paper: 99+% removal efficiency standard to 2 micron
- Temp (continuous): min -26°C (-15°F) max 104°C (220°F)
- Filter change out differential: 37-50 mbar over initial ΔP

Polyester Media Benefits/Specs

- Less maintenance due to longer durability
- Moisture resistant
- Handles hot air and oil mist from unload cycle of reciprocating/piston compressor
- Washable with lukewarm water and mild detergent (replacing element is recommended)

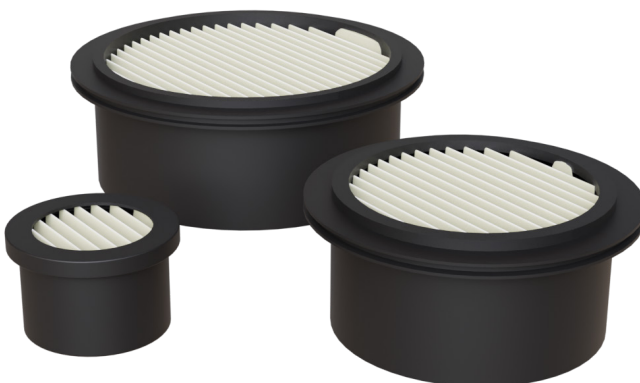


Paper Media Benefits/Specs

- Heavy duty industrial strength paper
- Cost effective
- Gently blow out media (replacing element is recommended)

Element Part Number		Element m ³ /hr Rating	Surface Area (m ²)	Dimensions (mm)	
Polyester	Paper			O.D.	H.T.
03™	02™	5	0.009	40	25
05™	04™	14	0.019	60	25
07™	06™	20	0.054	78	35
11™	10™	60	0.10	102	37
17*	16™	425	0.74	191	83

*Minimum order quantity applies.

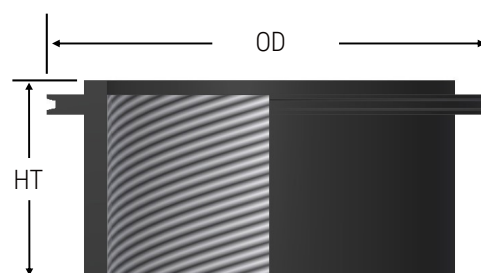

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

All model offerings and design parameters are subject to change without prior notice. Contact your representative or visit www.solbergmfg.com for the most current information.

Contact Us

solbergmfg.com/locations



Rev: M2506C2