

High Efficiency Replacement Elements

UL Elements 12 - 2370 m³/hr Flow Range

Features

- Pleated media for high dirt holding capacity
- Heavy duty industrial strength glass surrounded by galvanized expanded metal
- Sized to minimize pressure drop
- Platisol potting standard

Technical Specifications


- 99.99% removal efficiency to 0.1 micron
- Temp (continuous): min -26C (-15F), max 104C (220F)

Applications

- Medical / Pharmaceutical industry



Element Part Number	Element m ³ /hr Rating	Dimensions (mm)			Std. Endcap Features
		I.D.	O.D.	H.T.	
UL10	18	--	102	35	--
UL14	15	76	111	59	M
UL18	37	76	111	121	M
UL30	95	92	146	121	M
UL34	161	121	200	122	M
UL230	190	92	146	241	M
UL234	352	121	200	244	GN
UL238	558	124	235	254	GN
UL244	587	152	248	244	GN
UL274	734	203	298	244	GN
UL334	547	121	200	368	GN
UL344	866	152	248	368	GN
UL374	1092	203	298	368	GN
UL376	1974	229	371	368	GN
UL384	2370	356	498	368	GN

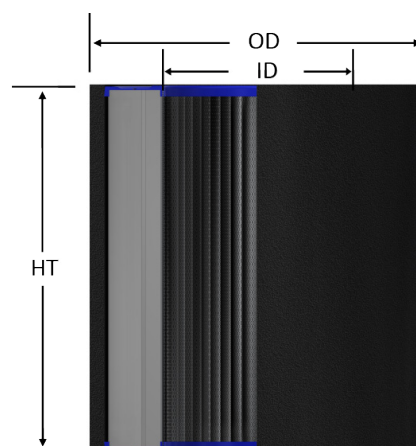

Endcap Construction

- B = Closed one end with bolt hole, open on other end
- C = Closed one end, open on other end
- G = Galvanized metal
- M = Molded plastisol
- N = Neoprene blended gasket on open endcaps
- R = Mixed rubber/cork gasket on open endcaps

800 Series Elements

Element Part Number	Element m ³ /hr Rating	Dimensions (mm)			Std. Endcap Features
		I.D.	O.D.	H.T.	
UL824	12	38	64	68	GC
UL842	24	60	98	70	G
UL848	73	65	127	121	G
UL850	219	89	149	222	GR
UL850/1	219	89	149	222	GBR
UL896	82	60	101	214	GB

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

Rev: M2512C2

Contact Us
solbergmfg.com/locations



All model offerings and design parameters are subject to change without prior notice. Contact your representative or visit www.solbergmfg.com for the most current information.

