

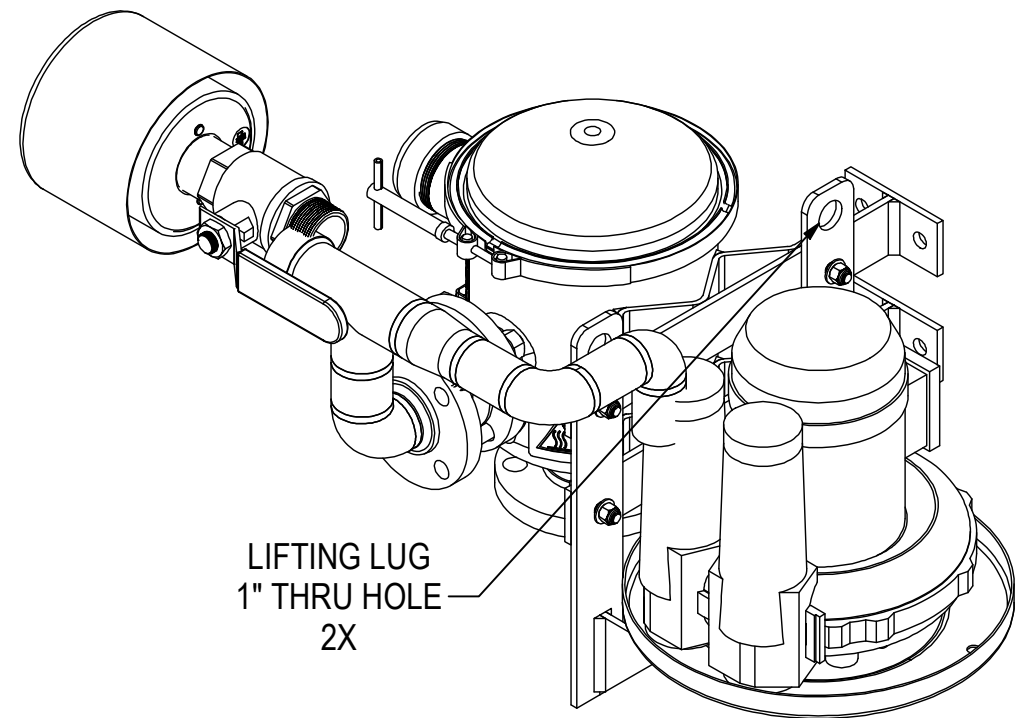
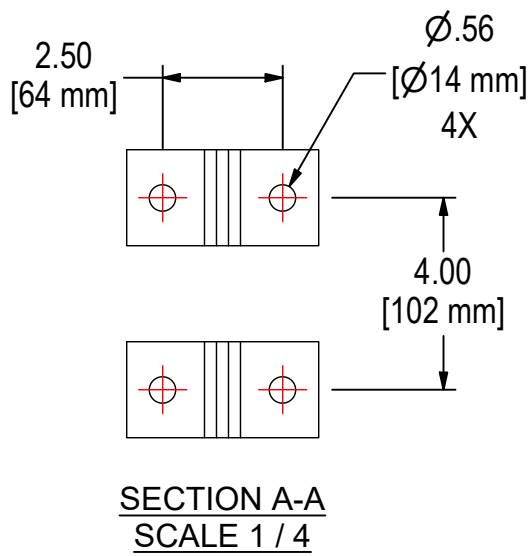


REV	DESCRIPTION	ECN #	CHG BY	DATE	APP'D
A	ADDED LIFTING HOLES	1971	JCB	03/07/18	CJS
B	ADDED NAMEPLATE & BRACKET	1994	JCB	03/23/18	CJS
C	REVISED PARAMETERS TABLE	2079	JCB	08/24/18	CJS
D	ADDED REPLACEMENT FILTER KIT PART NUMBER	-	JCB	07/30/19	CJS
E	ADDED VR NUMBER	26350	TAS	04/18/23	JSR

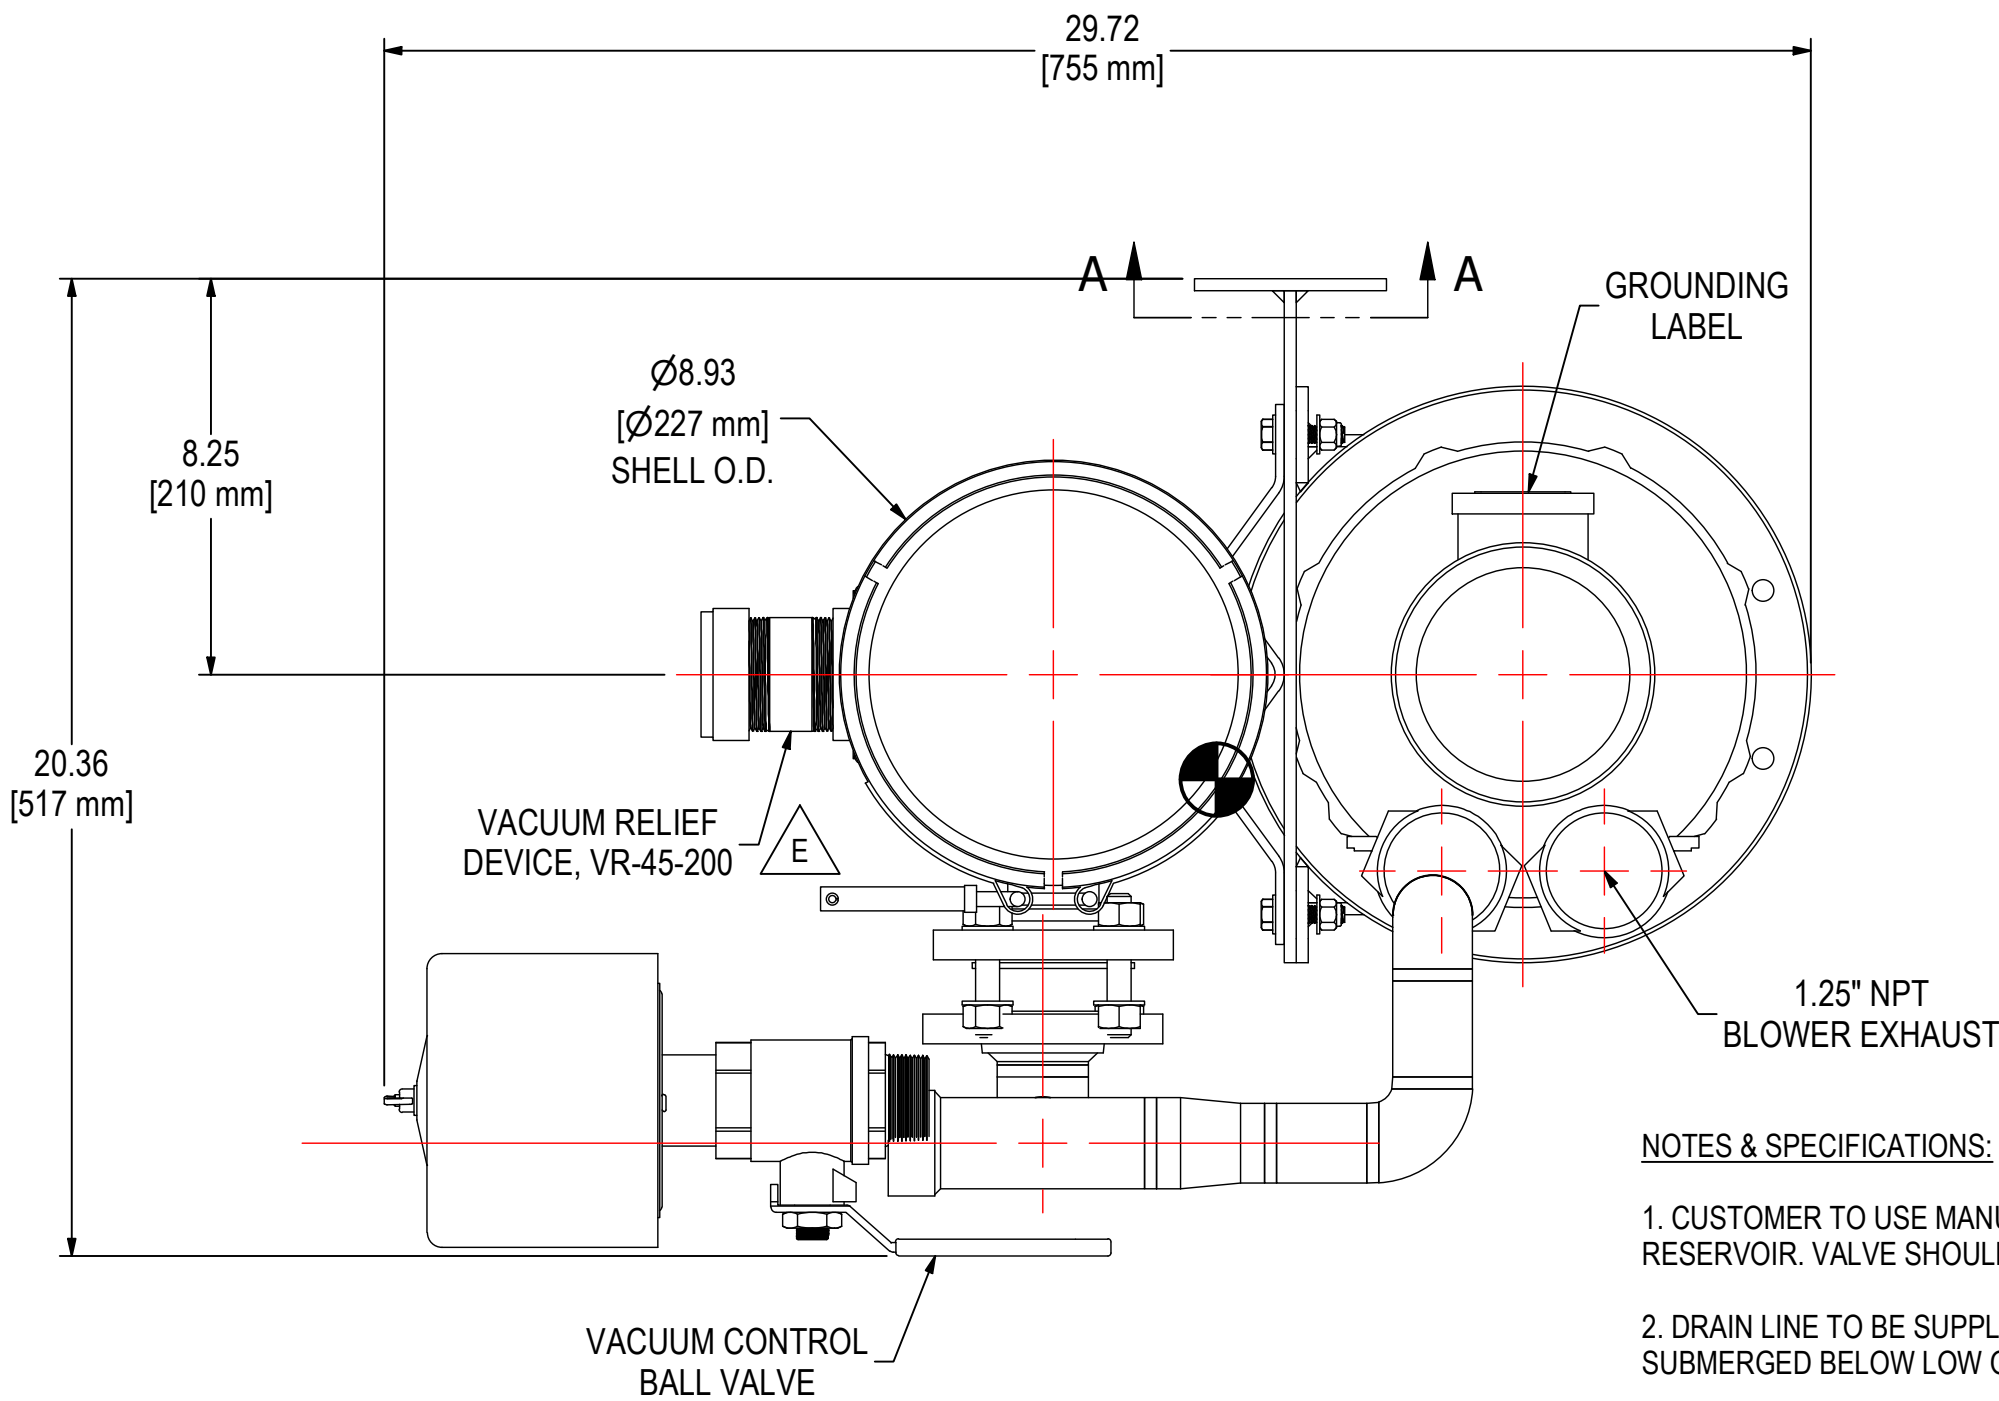


NOTES & SPECIFICATIONS:

1. CUSTOMER TO USE MANUAL BALL VALVE TO ADJUST VACUUM LEVEL INSIDE RESERVOIR. VALVE SHOULD BE IN OPEN POSITION DURING START UP.
2. DRAIN LINE TO BE SUPPLIED AND INSTALLED BY CUSTOMER. LINE MUST BE SUBMERGED BELOW LOW OIL LEVEL OF WASTE OIL CONTAINER AT ALL TIMES.
3. SOLBERG NOT LIABLE FOR ANY MOUNTING ISSUES IN FIELD INSTALLATIONS.
4. RECOMMENDED ELEMENT CHANGE-OUT PRESSURE DROP: 40" WC

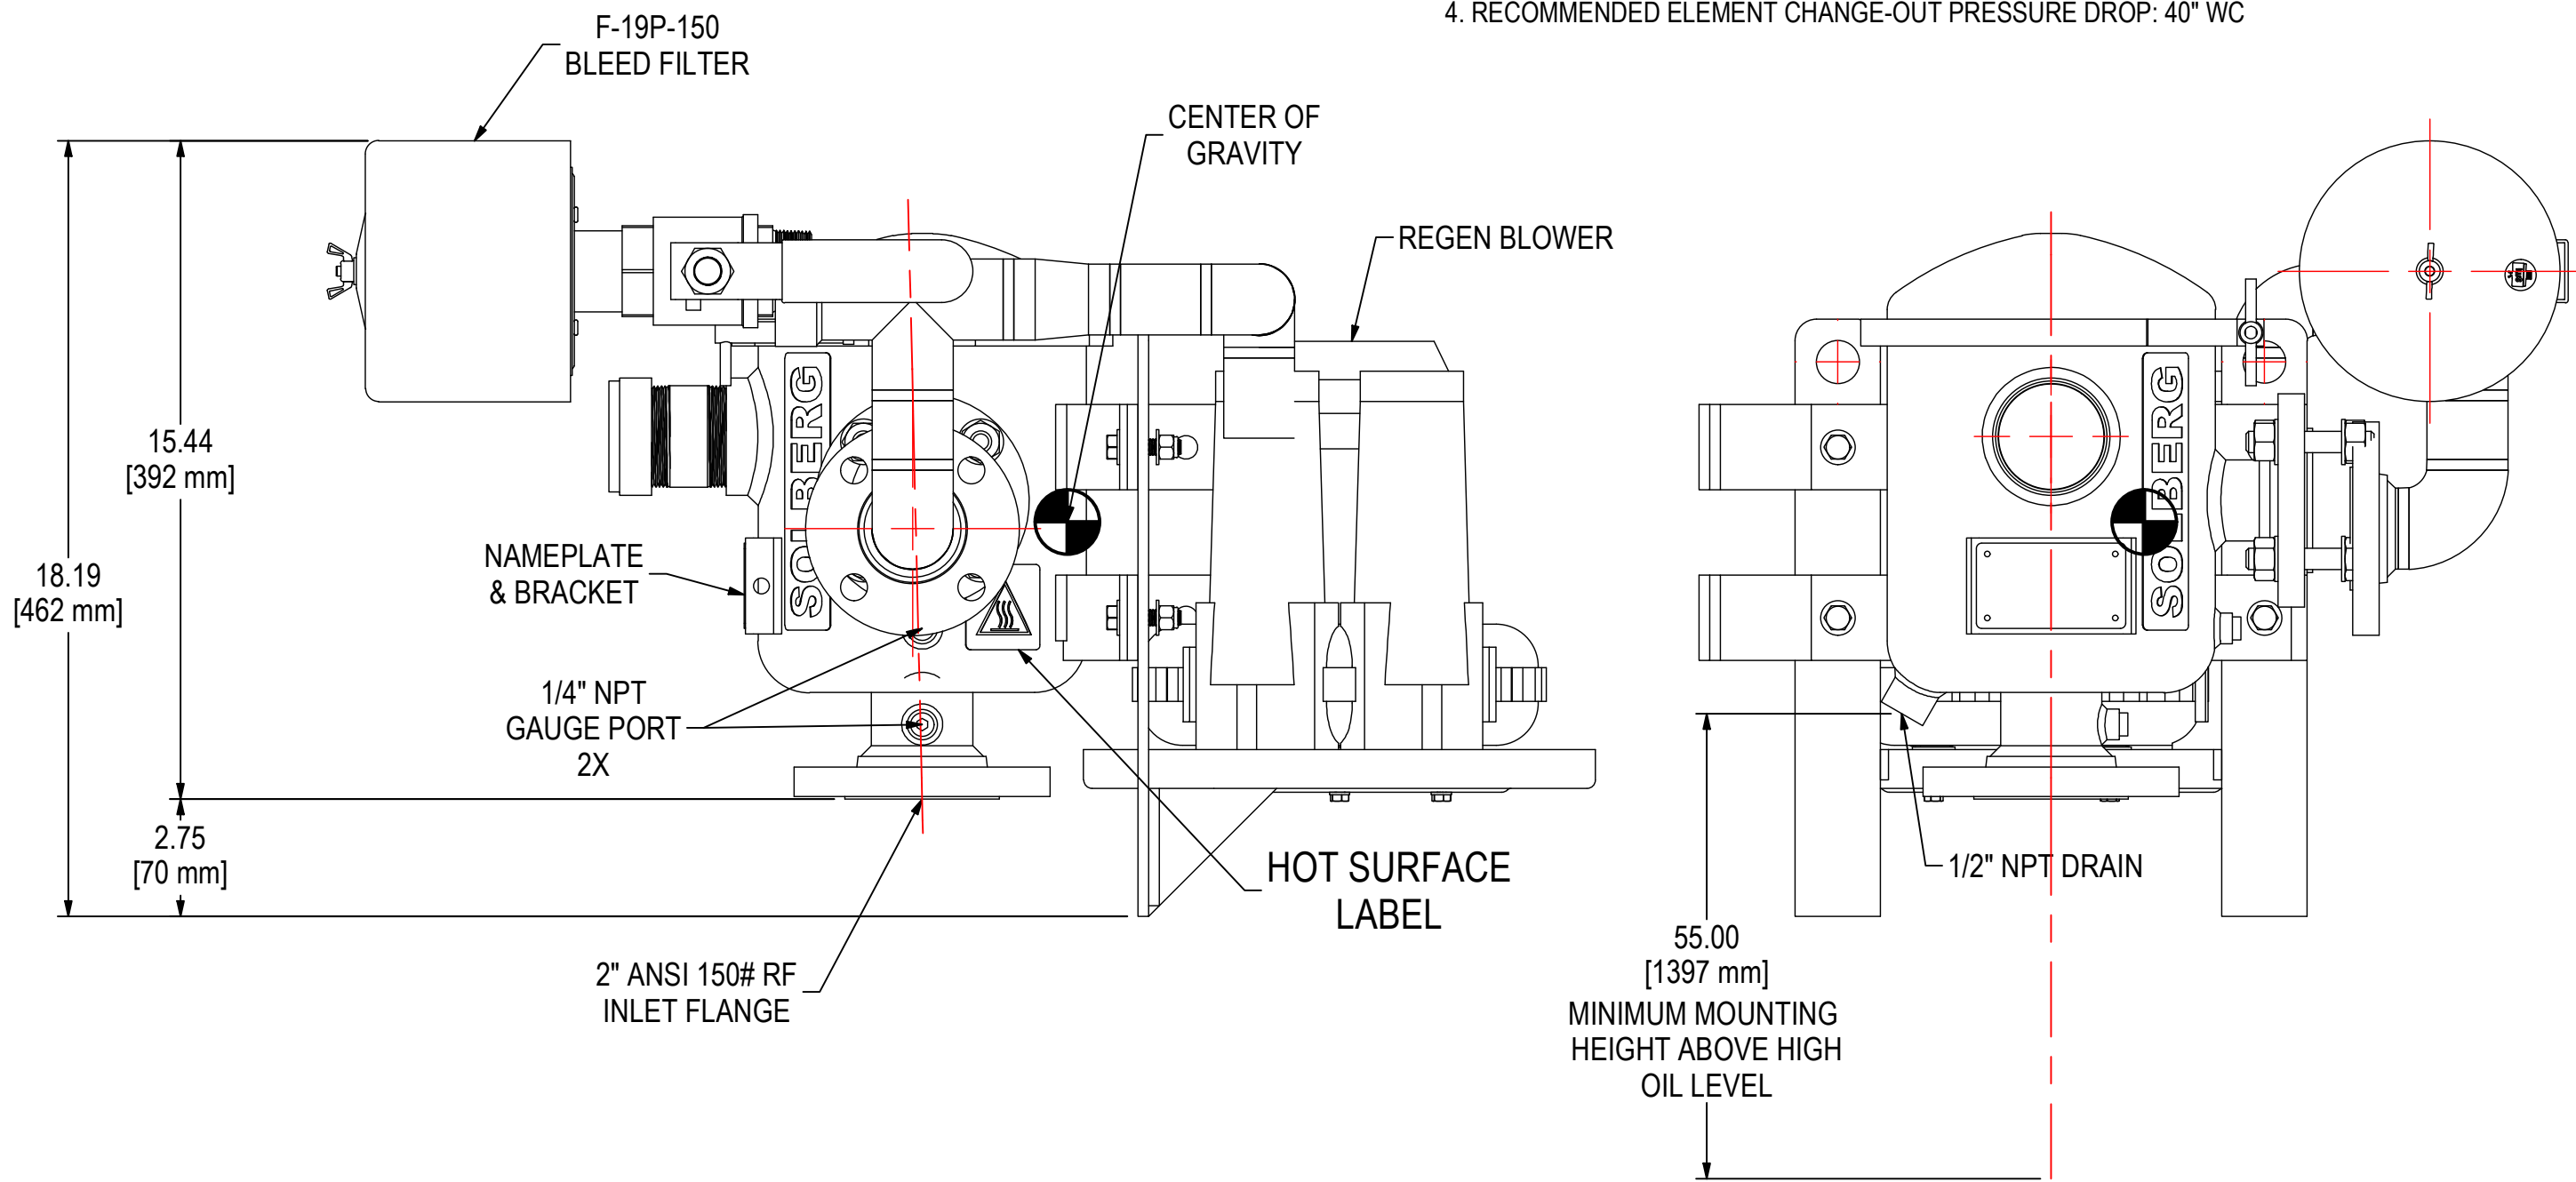

OME DESIGN PARAMETERS				
MATERIALS OF CONSTRUCTION	Carbon Steel			
FINISH	RAL 7036, PLATINUM GRAY			
FLOW RATE (50Hz/60Hz)	20/30 CFM		34/51 m³/hr	
VACUUM LEVEL	-1 to -5" WC		-2 to -12 mBar	
DRAIN LINE	0.5" NPT			
ELEMENT REMOVAL CLEARANCE	9"		229 mm	
SYSTEM MOUNTING HEIGHT	55"		1397 mm	
PRESSURE RELIEF VALVE	N/A		N/A	
VACUUM RELIEF VALVE	-45" WC		-112 mBar	
PROCESS TEMPERATURE	< 180°F		< 82°C	
BLOWER SPECIFICATIONS	-			
ASSEMBLY CERTIFICATIONS	-			
SEPARATOR PROPERTIES				
REPLACEMENT ELEMENT	CEG850/1	QTY.	1	
SEPARATOR EFFICIENCY	99.97% @ 0.3 micron			
BLEED FILTER ELEMENT	19P			
REPLACEMENT FILTER KIT	SME-A30-FKBF			
MOTOR SPECIFICATIONS				
HORSEPOWER	0.75 HP	0.56 kW	PHASE	3φ
INSULATION RATING	Class F (B)			
ENCLOSURE	TEFC			
AMBIENT TEMPERATURE	40C			
INGRESS PROTECTION	IP55, Tropicalized			
POLES	2 (60 Hz 3600RPM/ 50 Hz 3000RPM)			
Cable Gland Entry 1 with Gland	M16			
Cable Gland Entry 2 W/O Gland	M20			
OPTIONS	cURus, CE, Thermal Protector: Klixon 150C, 3-Phase AC Motor IEC 60034			
60Hz OPERATIONS				
VOLTAGE	208-230/460			
FULL LOAD AMPS	2.7/1.2			
EFFICIENCY LEVEL	68.8%			
50Hz OPERATIONS				
VOLTAGE	230/400			
FULL LOAD AMPS	2.6/1.5			
EFFICIENCY LEVEL	69.0%			
UNIT PROPERTIES				
APPROXIMATE UNIT WEIGHT	95 LBS.	43 kg		
LID WEIGHT	3 LBS.	1 kg		
SEPARATOR WEIGHT	3 LBS.	1 kg		
ELASTOMERS	Viton			
NAMEPLATE DESIGN PARAMETERS				
MATERIALS OF CONSTRUCTION	Aluminum			



SOLBERG®
Filtration • Separation • Silencing
 630.773.1363 • www.solbergmfg.com

THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC. AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

TOLERANCES
 DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE UPON PRODUCTION.
 UNLESS OTHERWISE SPECIFIED:
 -DIMENSIONS ARE IN INCHES
 -REF: APPROXIMATE DIMENSIONS, NO TOLERANCES APPLY
 -FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER

MODEL NUMBER: SME-M-C-A30-MOR

DESCRIPTION: SME MIST ELIMINATOR, CEG850/1, 30 CFM, 200RF INLET, K03-MOR BLOWER, F-19P-150 BLEED FILTER

PROJECT:

DRAWN BY: JCB
 DATE: 11/1/2017

APPROVED BY: CJS
 DATE: 11/1/2017

SHEET:
 1 OF 1

REV:
 E