

	REV	DESCRIPTION	ECN#	CHG BY	DATE	APP'D
	Α	UPDATED ELEMENT TABLE	20312	NAD	10/13/20	TAS
	В	UPDATED ELEMENT SPECS	30433	NAS	12/12/24	CJM
·						



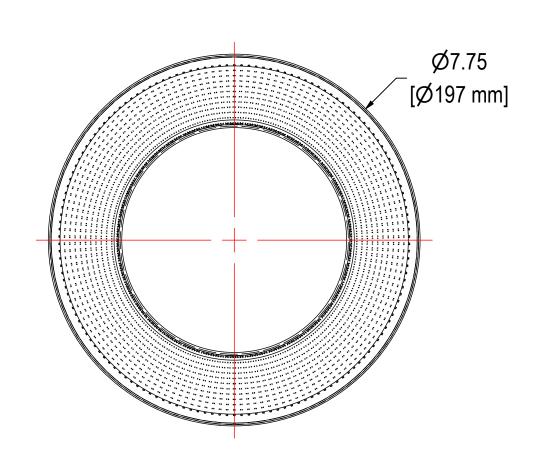

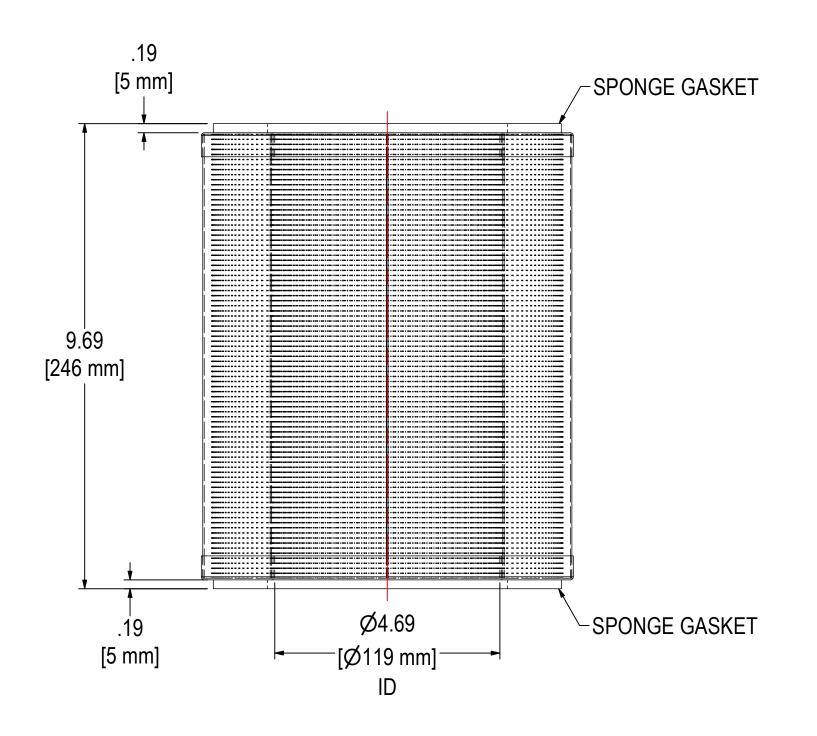

NOTES & SPECIFICATIONS

1. 99.995% EFFICIENT @ 0.1 MICRON.



ELEMENT SPECS							
PART NUMBER	UL234						
MATERIAL	ULPA						
FLOW RATE	217 CFM	369 m³/hr					
SURFACE AREA	22.1 ft ²	2.1 m ²					
I.D.	4.69"	119mm					
O.D.	7.75"	197mm					
HEIGHT	9.69"	246mm					



THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC. AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

TOLERANCES

DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE **UPON PRODUCTION.**

UNLESS OTHERWISE SPECIFIED:
-DIMENSIONS ARE IN INCHES
-REF: APPROXIMATE DIMENSIONS, NO TOLERANCES APPLY
-FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER

MODEL NUMBER: UL234	SHEET
	1 OF 1

DESCRIPTION: UL234, ULPA, BROWN PLASTISOL, SPONGE

PROJECT:	DRAWN BY: TAS	APPROVED BY: NAD	REV:
	DATE : 6/13/2018	DATE : 6/13/2018	В