

Discharge Silencer with Filter


EFS Series 3/8" - 1", NW16 - NW25

Features

- Captures tip seal dust
- Compact design combines both filtration efficiency and noise reduction
- Integrated inlet diffuser optimizes sound attenuation
- Multi-stage noise reducing features, including final stage sound absorbent insert
- Tubular silencing design - tube is positioned to maximize attenuation and air flow while minimizing pressure drop
- Patented high grade element with built-in Butterfly gasket seal which creates a positive seal between housing hemispheres, and a new seal with each element
- Seamless drawn housings
- Corrosive resistant black powder coat carbon steel
- Ability to mount vertically, or horizontally

Technical Specifications

- Temp (continuous): min -15°F (-26°C) max 220°F (104°C)
- Polyester: 99%+ removal efficiency standard to 10 micron

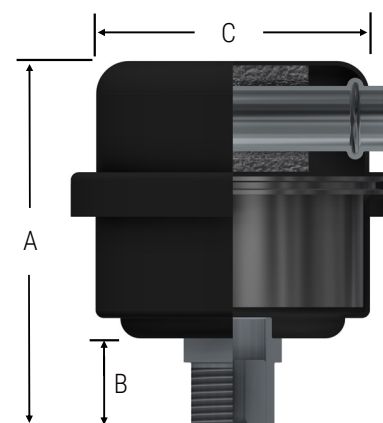

Inlet / Outlet		Assembly SCFM Rating	Assembly Part Number	Dimensions (inches)			Suggested Service Height (inches)	Approx. Weight (lbs)
Size	Type			A	B	C		
3/8"	MPT	2.1	EFS-05-038/1	2.80	0.69	2.48	2	0.50
1/2"	MPT	9	EFS-07-050/1	3.77	0.89	3.20	2	0.75
NW16	ISO Flange	9	EFS-07-NW16/1	3.76	0.88	3.20	2	0.75
NW25	ISO Flange	11	EFS-07-NW25/1	3.74	0.86	3.20	2	0.75
1"	MPT	24	EFS-11-100/2	4.52	1.24	4.15	2	1.25
NW25	ISO Flange	24	EFS-11-NW25/2	4.13	0.86	4.15	2	1.25

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

Sales/Service: +1 (630) 773-1363
sales@solbergmfg.com