

High Efficiency Replacement Elements

HE Elements 1 - 1395 SCFM Flow Range

Features

- Pleated media for high dirt holding capacity
- Heavy duty industrial strength glass surrounded by galvanized expanded metal
- Sized to minimize pressure drop
- Platisol potting standard

Technical Specifications


- 99.97% removal efficiency to 0.3 micron
- Temp (continuous): min -15°F (-26°C), max 220°F (104°C)

Applications

- Medical / Pharmaceutical industry



Element Part Number	Element SCFM Rating	Dimensions (inches)			Std. Endcap Features
		I.D.	O.D.	H.T.	
HE04	1	--	2.38	1	--
HE06	5	--	3	1.38	--
HE10	10	--	4	1.38	--
HE14	9	3	4.38	2.31	M
HE18	22	3	4.38	4.75	M
HE30	56	3.63	5.75	4.75	M
HE34	95	4.75	7.88	4.81	M
HE230	112	3.63	5.75	9.5	M
HE234	207	4.75	7.88	9.63	GN
HE238	329	4.88	9.25	10	GN
HE244	346	6	9.75	9.63	GN
HE274	432	8	11.75	9.63	GN
HE334	322	4.75	7.88	14.5	GN
HE344	510	6	9.75	14.5	GN
HE374	643	8	11.75	14.5	GN
HE376	1162	9	14.63	14.5	GN
HE384	1395	14	19.63	14.5	GN

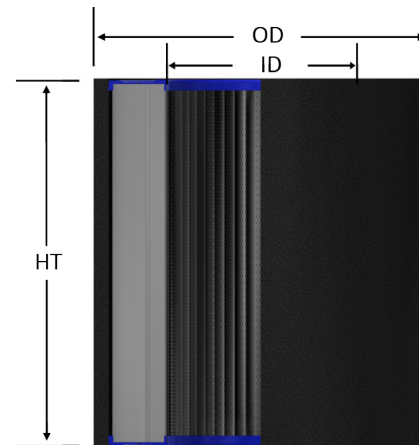

Endcap Construction

- B = Closed one end with bolt hole, open on other end
- C = Closed one end, open on other end
- G = Galvanized metal
- M = Molded plastisol
- N = Neoprene blended gasket on open endcaps
- R = Mixed rubber/cork gasket on open endcaps

800 Series Elements

Element Part Number	Element SCFM Rating	Dimensions (inches)			Std. Endcap Features
		I.D.	O.D.	H.T.	
HE824	7	1.5	2.5	2.63	GC
HE842	14	2.38	3.88	2.75	G
HE848	43	5	2.5	4.75	G
HE850	129	3.5	5.88	8.5	GR
HE850/1	129	3.5	5.88	8.5	GBR
HE896	48	2.38	4	8.5	GB

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

Sales/Service: +1 (630) 773-1363

sales@solbergmfg.com

All model offerings and design parameters are subject to change without prior notice. Contact your representative or visit www.solbergmfg.com for the most current information.

Rev: US2512C2

