

# High Efficiency Replacement Elements

## UL Elements 7 - 1395 SCFM Flow Range

### Features

- Pleated media for high dirt holding capacity
- Heavy duty industrial strength glass surrounded by galvanized expanded metal
- Sized to minimize pressure drop
- Platisol potting standard

### Technical Specifications


- 99.999% removal efficiency to 0.1 micron
- Temp (continuous): min -15°F (-26°C), max 220°F (104°C)

### Applications

- Medical / Pharmaceutical industry



Element Part Number	Element SCFM Rating	Dimensions (inches)			Std. Endcap Features
		I.D.	O.D.	H.T.	
UL14	9	3	4.88	2.38	M
UL18	22	2.98	4.40	4.81	M
UL30	56	3.63	5.75	4.88	M
UL34	95	4.75	7.88	4.84	M
UL230	112	3.63	5.75	9.50	M
UL234	207	4.78	7.88	9.47	GN
UL238	329	4.85	9.22	10.50	GN
UL244	346	6	9.77	9.63	GN
UL274	432	8	11.75	9.70	GN
UL334	322	4.75	7.88	14.22	GN
UL344	510	6	9.75	14.43	GN
UL374	643	8	11.75	14.43	GN
UL376	1162	9	14.63	14.45	GN
UL384	1395	14	19.63	14.45	GN

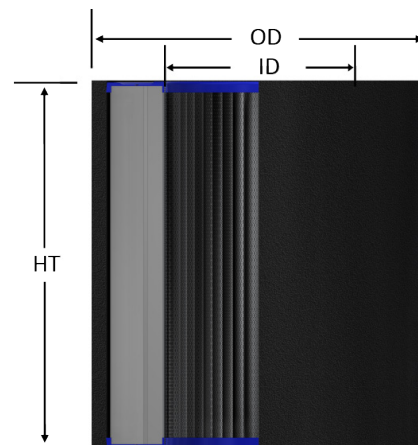

## Endcap Construction

- B = Closed one end with bolt hole, open on other end
- C = Closed one end, open on other end
- G = Galvanized metal
- M = Molded plastisol
- N = Neoprene blended gasket on open endcaps
- R = Mixed rubber/cork gasket on open endcaps

## 800 Series Elements

Element Part Number	Element SCFM Rating	Dimensions (inches)			Std. Endcap Features
		I.D.	O.D.	H.T.	
UL824	7	1.50	2.54	2.66	GC
UL842	14	2.38	3.85	2.73	G
UL848	43	2.56	5	4.82	G
UL850	129	3.50	5.88	8.52	GR
UL850/1	129	3.50	5.88	8.52	GBR
UL896	48	2.38	3.98	8.44	GB

## Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

**Sales/Service: +1 (630) 773-1363**  
**sales@solbergmfg.com**

All model offerings and design parameters are subject to change without prior notice.  
 Contact your representative or visit [www.solbergmfg.com](http://www.solbergmfg.com) for the most current information.

Rev: US2512C2

