

Big Boy Inlet Filters

F Series 6" - 24"

Features

- Heavy gauge base with low pressure drop outlet pipe and center bracket design
- Low entry velocity air gap between base and cover
- Corrosive resistant gray powder coat carbon steel


Technical Specifications

- Temp (continuous): min -15°F (-26°C) max 220°F (104°C)
- Filter change out differential: 15-20" H₂O over initial ΔP
- Pressure drop graphs available upon request
- Polyester: 99%+ removal efficiency standard to 5 micron
- Paper: 99%+ removal efficiency standard to 2 micron



Outlet Flange Size	Assembly SCFM Rating	Assembly Part Number		Dimensions (inches)			Suggested Service Ht. (inches)	Approx. Weight (lbs)
		Polyester	Paper	A	B	C		
6"	1100	F-377P-600F	F-376P-600F	22.01	5.13	21.88	15	90
8"	1800	F-377P-800F	F-376P-800F	23.13	6.13	21.88	15	100
8"	1800	F-385P-800F	F-384P-800F	23.13	6.13	28.09	15	125
10"	3300	F-385P-1000F	F-384P-1000F	23.13	6.13	28.31	15	130
10"	3300	F-485P-1000F	F-484P-1000F	30.13	6.13	28.31	22	143
12"	4700	F-485P-1200F	F-484P-1200F	30.12	6.13	28.31	22	155
12"	4700	F-685P-1200F	F-384P(2)-1200F	38.64	6.13	28.31	29	175
14"	6000	F-485P(2)-1400F	F-484P(2)-1400F	53.64	6.13	28.31	22	245

Outlet Flange Size	Assembly SCFM Rating	Assembly Part Number		Dimensions (inches)			Suggested Service Ht. (inches)
		Polyester	Paper	A	B	C	
18"	5500	F-391-1800F	F-390-1800F	26.48	6.13	43.00	16
18"	8000	F-491-1800F	F-490-1800F	31.98	6.13	43.00	23
20"	8000	F-491-2000F	F-490-2000F	31.98	6.13	43.00	23
24"	8000	F-491-2400F	F-490-2400F	31.98	6.13	43.00	23

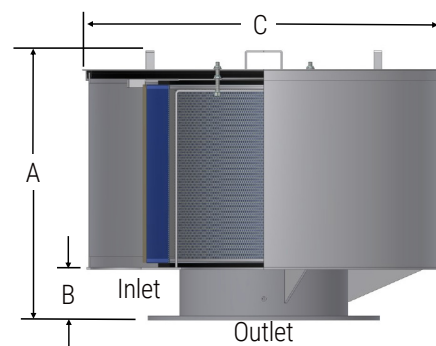

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

Sales/Service: +1 (630) 773-1363
sales@solbergmfg.com