

Exposed Inlet Filters


FT Series 1/2" - 14"

Features


- Exposed element for optimal air flow & low restriction
- Heavy gauge base with low pressure drop outlet pipe and center bracket design
- Corrosive resistant gray powder coat carbon steel

Technical Specifications

- Temp (continuous): min -15°F (-26°C) max 220°F (104°C)
- Filter change out differential: 15-20" H₂O over initial ΔP
- Pressure drop graphs available upon request
- Polyester: 99%+ removal efficiency standard to 5 micron
- Paper: 99%+ removal efficiency standard to 2 micron

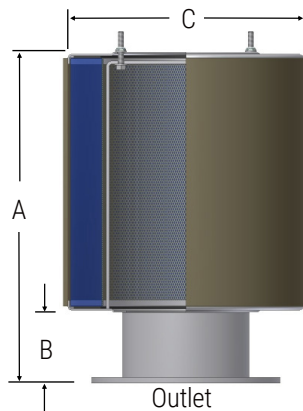

Outlet		Assembly SCFM Rating	Assembly Part Number		Dimensions (inches)			Suggested Service Ht. (inches)	Approx. Weight (lbs)
Size	Type		Polyester	Paper	A	B	C		
4"	Flange	520	FT-235P-400F	FT-234P-400F	14.70	4.00	8.12	10	15
4"	Flange	520	FT-275P-400F	FT-274P-400F	15.01	4.13	12.00	10	24
5"	Flange	800	FT-275P-500F	FT-274P-500F	15.00	4.13	12.00	10	28
6"	Flange	1100	FT-275P-600F	FT-274P-600F	16.01	5.13	12.00	10	31
8"	Flange	1800	FT-377P-800F	FT-376P-800F	21.75	6.13	15.01	15	53
8"	Flange	1800	FT-385P-800F	FT-384P-800F	21.91	6.13	20.00	15	70
10"	Flange	3300	FT-385P-1000F	FT-384P-1000F	21.93	6.13	20.00	15	80
10"	Flange	3300	FT-685P-1000F	FT-384P(2)-1000F	36.93	6.13	20.00	29	95
12"	Flange	4700	FT-485P-1200F	FT-484P-1200F	29.93	6.13	20.38	22	90
12"	Flange	4700	FT-685P-1200F	FT-384P(2)-1200F	36.93	6.13	20.00	29	100
14"	Flange	6000	FT-485P(2)-1400F	FT-484P(2)-1400F	51.94	6.13	20.00	22	160

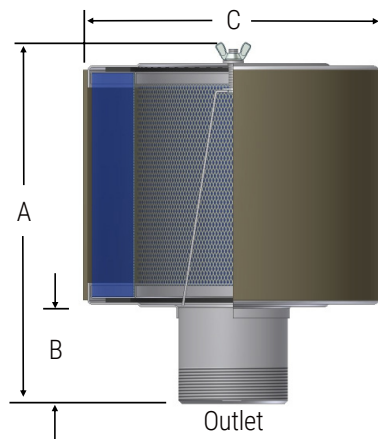

Outlet		Assembly SCFM Rating	Assembly Part Number		Dimensions (inches)			Suggested Service Ht. (inches)	Approx. Weight (lbs)
Size	Type		Polyester	Paper	A	B	C		
1/2"	MPT	10	FT-15-050	FT-14-050	4.16	1.75	4.60	3	1
3/4"	MPT	25	FT-15-075	FT-14-075	4.16	1.75	4.60	3	1
1"	MPT	35	FT-15-100	FT-14-100	4.43	1.24	4.60	3	1
1"	MPT	55	FT-19P-100	FT-18P-100	7.45	1.75	4.60	5	2
1 1/4"	MPT	70	FT-19P-125	FT-18P-125	7.22	1.63	4.60	5	2
1 1/2"	MPT	85	FT-19P-150	FT-18P-150	7.34	1.75	4.60	5	2
2"	MPT	135	FT-31P-200	FT-30P-200	7.85	2.25	6.00	5	3
2"	MPT	135	FT-231P-200	FT-230P-200	12.65	2.25	6.00	10	7
2 1/2"	MPT	195	FT-31P-250	FT-30P-250	8.17	2.50	6.00	5	4
2 1/2"	MPT	195	FT-231P-250	FT-230P-250	12.97	2.50	6.00	10	7
3"	MPT	300	FT-231P-300	FT-230P-300	13.47	3.00	6.00	10	8
3"	MPT	300	FT-235P-300	FT-234P-300	13.60	3.00	8.12	10	13
3"	MPT	300	FT-275P-300	FT-274P-300	13.89	3.00	12.00	10	22
4"	MPT	520	FT-235P-400	FT-234P-400	14.64	4.00	8.13	10	17
4"	MPT	520	FT-275P-400	FT-274P-400	14.89	4.00	12.00	10	24
5"	MPT	800	FT-275P-500	FT-274P-500	14.89	4.00	12.00	10	25
6"	MPT	1100	FT-275P-600	FT-274P-600	15.89	5.00	12.00	10	27

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

Sales/Service: +1 (630) 773-1363

sales@solbergmfg.com

All model offerings and design parameters are subject to change without prior notice. Contact your representative or visit www.solbergmfg.com for the most current information.

Rev: US2504C2

